

HIGH FLOW FILTERS-292 MM MDF FRAME




TECHNICAL SPECIFICATIONS

Filter Media : Minipleat Micro Glass Fibre
 Frame Material : MDF
 Classification (EN1822): E10 - U17
 Gasket : Cont. Round Pu / Flat Epdm
 Separator : Hotmelt
 Sealant : 2K Polyur ethane
 Final Pressure Drop : 600 Pa
 Max. Temperature : 80 °C
 Max. Moisture : 90%



PRODUCT CODE	CLASS EN1822	WIDTH (mm)	HEIGHT (mm)	DEPTH (mm)	FILTRATION AREA (m2)	NOMINAL AIR FLOW (m3/h)	INITIAL PRESSURE DROP (± 10% Pa)
HFF-10-M-305-305-X-DP	E 10	305	305	292	5,25	500	210
HFF-10-M-305-610-X-DP	E 10	305	610	292	10,50	1000W	210
HFF-10-M-610-610-X-DP	E 10	610	610	292	21,00	2000	210
HFF-10-M-305-305-X-DP	H 13	305	305	292	5,25	500	250
HFF-13-M-305-610-X-DP	H 13	305	610	292	10,50	1000	250
HFF-13-M-610-610-X-DP	H 13	610	610	292	21,00	2000	250
HFF-14-M-305-305-X-DP	H 14	305	305	292	5,25	500	270
HFF-14-M-305-610-X-DP	H 14	305	610	292	10,50	1000	270
HFF-14-M-610-610-X-DP	H 14	610	610	292	21,00	2000	270
HFF-10-M-305-305-XL-DP	E 10	305	305	292	6,75	750	210
HFF-10-M-305-610-XL-DP	E 10	305	610	292	13,50	1500	210
HFF-10-M-610-610-XL-DP	E 10	610	610	292	27,00	3000	210
HFF-10-M-305-305-XL-DP	H 13	305	305	292	6,75	750	250
HFF-13-M-305-610-XL-DP	H 13	305	610	292	13,50	1500	250
HFF-13-M-610-610-XL-DP	H 13	610	610	292	27,00	3000	250
HFF-14-M-305-305-XL-DP	H 14	305	305	292	6,75	750	270
HFF-14-M-305-610-XL-DP	H 14	305	610	292	13,50	1500	270
HFF-14-M-610-610-XL-DP	H 14	610	610	292	27,00	3000	270

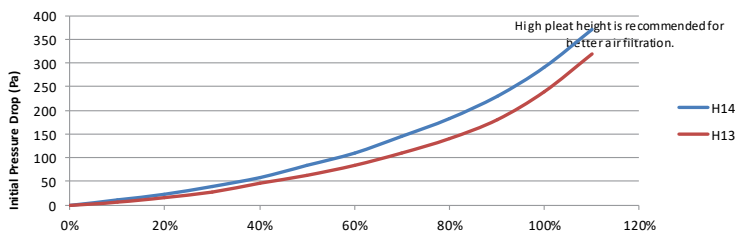

Available Pleat Height

